

Worldwide Locations

CHANDLER ENGINEERING®

Headquarters

2001 North Indianwood Avenue
Broken Arrow, OK 74012-1163 U.S.A.
Phone: +1 918 250 7200
Fax: +1 918 459 0165
chandler.sales@ametek.com
chandler.service@ametek.com
www.chandlereng.com

Sales and Service Offices

AMETEK Oil & Gas - Houston Sales and Service
4903 W. Sam Houston Parkway N., Ste A-400
Houston, TX 77041
Phone: +1 713 466 4900

AMETEK Singapore Pte. Ltd. (Asia Sales)
Phone: +65 6484 2388
Email: chandler.asia@ametek.com

AMETEK Moscow (Russia Sales)
Phone: +7 495 660 8208
Email: chandler.russia@ametek.com

AMETEK Chandler Engineering - U.K. (EU, ME, Africa)
Phone: +44 (0) 1224 725222
Email: chandler.uk@ametek.com

Chandler Australia
Phone: +61 3 9761 7194
Email: chandler.australia@ametek.com

Chengdu Industrial Trading & Supply Co. (China)
Phone: +86 28 86162896 or +86 28 86162897
Email: chandler.china@ametek.com

AMETEK Brazil
Phone: +55 19 3825 8904
Email: chandler.brazil@ametek.com

AMETEK UAE
Phone: +971 52 645 3606 or +44 (0) 1224 725222
Email: chandler.uae@ametek.com



The Oil & Gas Industry is truly a global endeavor with operations on every populated continent. As a global industry needs global support, AMETEK Oil & Gas strives to continuously grow and develop its sales and support network. In addition to a global network of factory trained personnel, AMETEK Oil & Gas maintains factory-direct customer support capabilities at its manufacturing sites and a growing number of regional offices.

Continuous product development may make it necessary to change product details without notice.

This communication contains the following trademarks and/or registered trademarks: AMETEK, CHANDLER ENGINEERING, AMETEK OIL & GAS. These trademarks or registered trademarks and stylized logos are all owned by AMETEK, Inc. All other company, product and service names and logos are trademarks or service marks of their respective owners.

ENHANCED FLOW LOOP SOLUTIONS

CHANDLER
ENGINEERING®

AMETEK®

Enhanced Flow Loop Systems are ideal for testing the effectiveness of friction reducers and scale inhibitors at controlled shear rates, temperatures and pressures. Flow rates, pipe diameters and base fluids may be varied to match your well conditions. Chandler Engineering welcomes the opportunity to review your application and match our state of the art instruments to your specific testing requirements.


Model 6500 Friction Flow Loop System

The fully automated Model 6500 Friction Flow Loop system measures the friction pressure of well bore fluids. It determines the associated affects friction reducers have on fluids over a wide range of pressure and flow rate conditions and through different pipe diameters.

This Model circulates fluid through two test sections of various diameters in order to generate differential pressure versus flow rate data. This data helps to determine the effectiveness and longevity of various friction reducing agents added to the test fluids.

Features:

- Open or Closed Loop Architecture
- Easy to Set-Up, Operate and Calibrate
- Flush-and-Fill Automation for Easy System Clean-up
- Wall or Floor Mountable

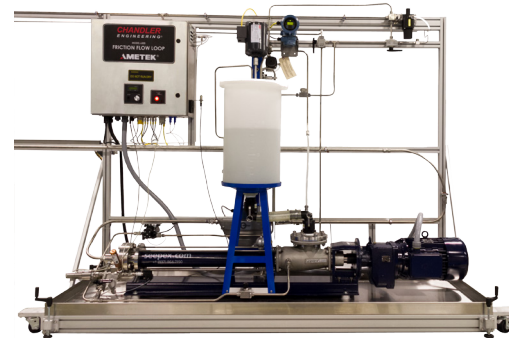

Model 6500 Friction Flow Loop System

Model 6500-M Mini-Loop™ System

The Model 6500-M Mini-Loop™ is a benchtop instrument that allows for rapid test turn-around for the repeat testing of stimulation fluids. The Mini Flow Loop circulates fluid through a single test section and uses custom Chandler Engineering software to record and analyze the test data. This enables reliable testing in a simple to operate, compact system. The unit is ideal for Quality Control Testing of Slick Water Fracturing Fluids.

Features:


- Benchtop Unit
- Easy to Set-Up, Operate and Calibrate
- Over Pressure Relief Valve
- Progressive Cavity Pump for Minimal Shearing of Fluids



Model 6500-M Mini-Loop™ System
(patent pending)

Data Acquisition and Control Software

The Chandler Data Acquisition and Control software is designed to be user-friendly and collects all required data during the test cycle for use in friction reduction calculations. Data may be stored in a test-specific .CSV file for analysis.

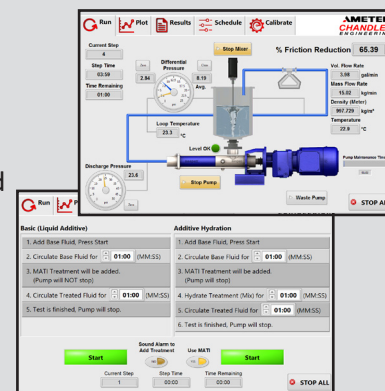

Model 5400 Dynamic Scale Deposition Loop

The Model 5400 Dynamic Scale Deposition Loop is a fully automated system that includes hardware and software to measure and evaluate the performance of scale inhibitors under high pressure and high temperature conditions.

The system consists of a test section of tubing placed within a convection oven providing exceptional temperature uniformity. Samples are pumped through the tubing at known rates while measuring the differential pressure across the test section. Scale formation inside the test section is indicated by an increase in differential pressure. Once the pressure reaches a user-settable threshold value, the test is complete and an automated clean-up phase begins.

Features:

- Forced Air Convection Oven
- Removable Sample and Preheat Tube Assembly
- Hastelloy C276 Sample Tubing and Fittings Inside Oven
- Microsoft Windows Based Control and Data Acquisition



Model 5400 Dynamic Scale Loop System

Model 8500 Pressurized Foam Rheometer

The Model 8500 Pressurized Foam Rheometer is designed specifically to measure the rheological properties of foamed systems under extended pressure and temperature conditions. The Model 8500 is a fully automated closed loop system that includes both hardware and software for the study of foam rheology over a wide range of foam qualities, shear rates and shear stresses.

An integrated high pressure view window allows visual determination of foam quality, stability and bubble distribution. An optional CCD camera and image acquisition system is available for video capture and image analysis of the foam through the view cell. The system incorporates a pulse free positive displacement Quizix pump for injection of the base fluid and volume determination. Differential pressure transducers are provided to cover a wide range of shear stress measurements.

Features:

- Coriolis Mass Flow Meter
 - Accurate Measurement and Feedback of Flow Rate
- Foam Generator
 - Gas and Liquid Mixing at the Desired Foam Quality
- High Pressure View Cell
 - Visually Monitor Foam Stability, Bubble Size and Bubble Distribution



Model 8500 Pressurized Foam Rheometer